

EUROROOF PREMIUM CAP SHEET




Euroroof Premium High Performance Roofing Systems comprise a reinforced APP polymer modified bituminous waterproofing membrane, underlays, insulation boards and air and vapour control layers (AVCL). Subject to the highest levels of certification and testing Euroroof Premium also features a superior reinforcement and APP composition for enhanced performance characteristics to other comparable membranes. Using a variety of installation methods and build-ups systems are designed to meet the individual requirements of every project for use across all building sectors in both refurbishment and new-build roofing and waterproofing projects.

✓ Where to Specify

- New Build
- Refurbishment
- Cold roofs
- Warm roofs (all roofing insulations)
- Overlay of existing waterproofing systems
- Compatible with all conventional roofing substrates

✓ Durability

BBA Certified - When installed on stable substrates and regularly maintained, the system will have a life in excess of 30 years.

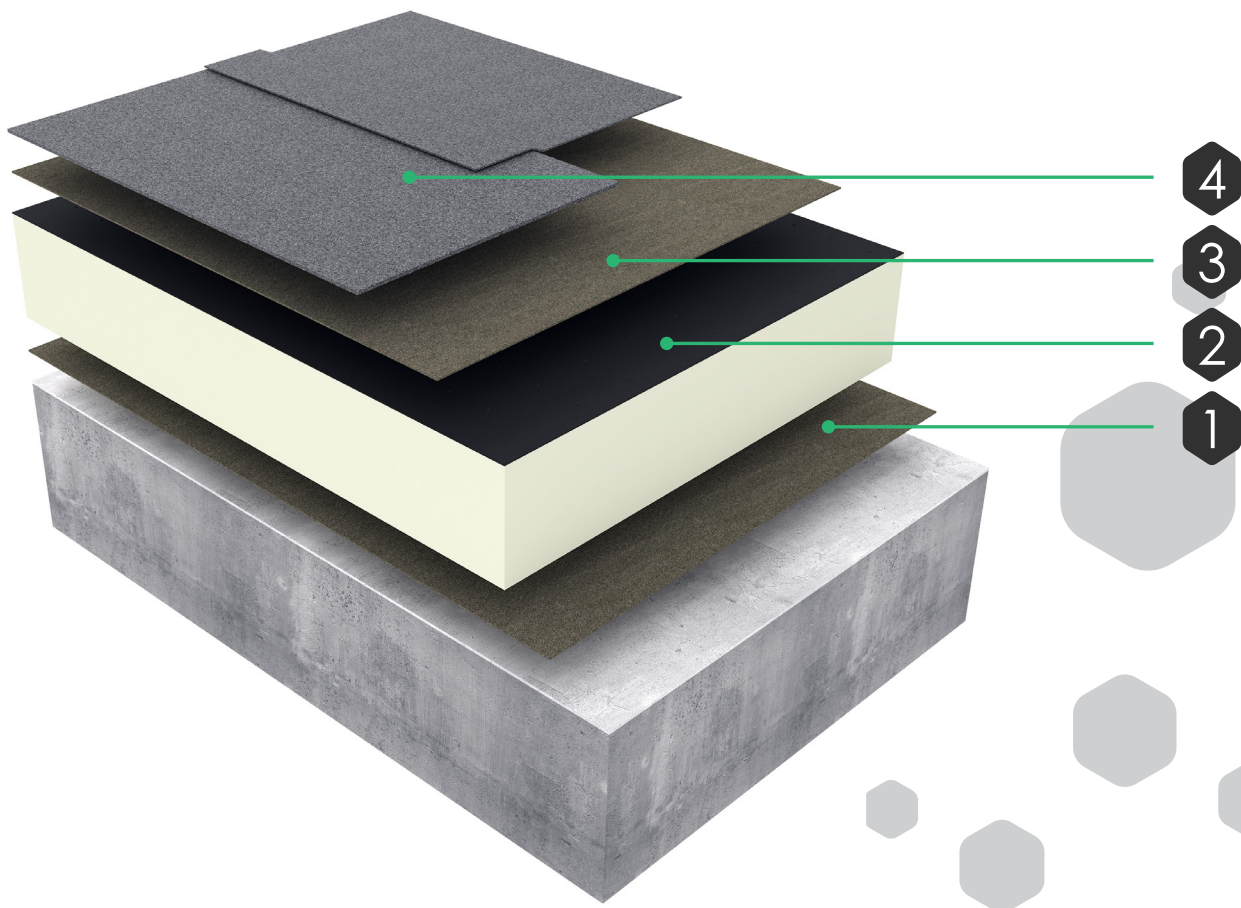


	Typical Torch-On Assembly
4	Euroroof Premium*
3	Euroroof Premium Underlay
2	PIR Insulation (type BGT) or Class A fire rated alternative
	PU Insulation Adhesive
1	Euroroof Torch-On AVCL
	Alumasc Bitumen Primer

	Typical Safe2Torch Assembly
4	Euroroof Premium*
3	Euroroof Self-Adhesive Underlay
	Euroroof SA Primer
2	PIR Insulation (type GTF) or Class A fire rated alternative
	PU Insulation Adhesive
1	Euroroof Self-Adhesive AVCL
	Euroroof SA Primer

*System layer variants are also available.

EUROROOF PREMIUM CAP SHEET


Other Common System Types

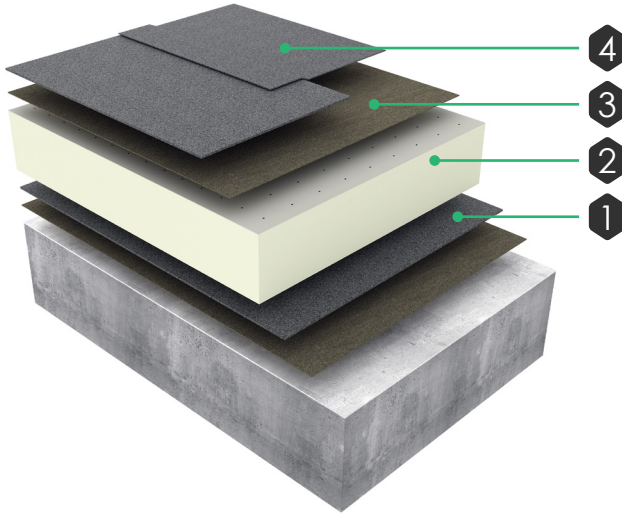

Insulated Overlay of Existing Waterproofing

4	Euroroof Premium
3	Torch-On/Self-Adhesive Underlay
2	PIR Insulation or Class A fire rated alternative
	PU Insulation Adhesive
1	Existing waterproofing

NB. Air & Vapour Control Layer may be required, subject to condition of the existing waterproofing.

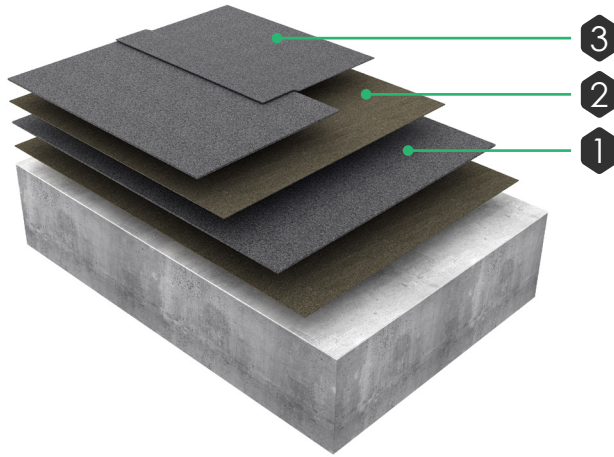

Cold Overlay of Existing Waterproofing

3	Euroroof Premium
2	Torch-On/Self-Adhesive Underlay
	Primer, type according to AVCL
1	Existing waterproofing

Approvals

- BBA Certificate No. 18/5525
- Fire classification of **B_{roof}(t4)** in accordance with BS EN 13501-5



Warranties

Alumasc offers a comprehensive range of single-source warranty options for up to 25 Years. Installed exclusively by Registered Contractors and underpinned by Alumasc's extensive project support service, Alumasc warranties cover product, workmanship, and design.

Technical Support

Alumasc Technical Services can advise on all aspects of product selection, specification and integration of Alumasc systems into any building design.