

EUROROOF SELF-ADHESIVE CAP SHEET



ALUMASC
ROOFING


Euroroof Self-Adhesive High Performance Roofing Systems comprise a premium self-adhesive reinforced SBS polymer modified bituminous waterproofing membrane, underlays, insulation boards and air and vapour control layers (AVCL). Specifically developed to meet the need for improved safety by using flame-free installation methods and removing the need for a naked flame. The system is fully adaptable to meet the individual requirements of every project for use across all building sectors in both refurbishment and new-build roofing and waterproofing projects.

✓ Where to Specify

- New Build
- Refurbishment
- Cold roofs
- Warm roofs (all roofing insulations)
- Overlay of existing waterproofing systems
- Compatible with all conventional roofing substrates

✓ Durability


When installed on stable substrates and regularly maintained, the system will have a life in excess of 25 years.

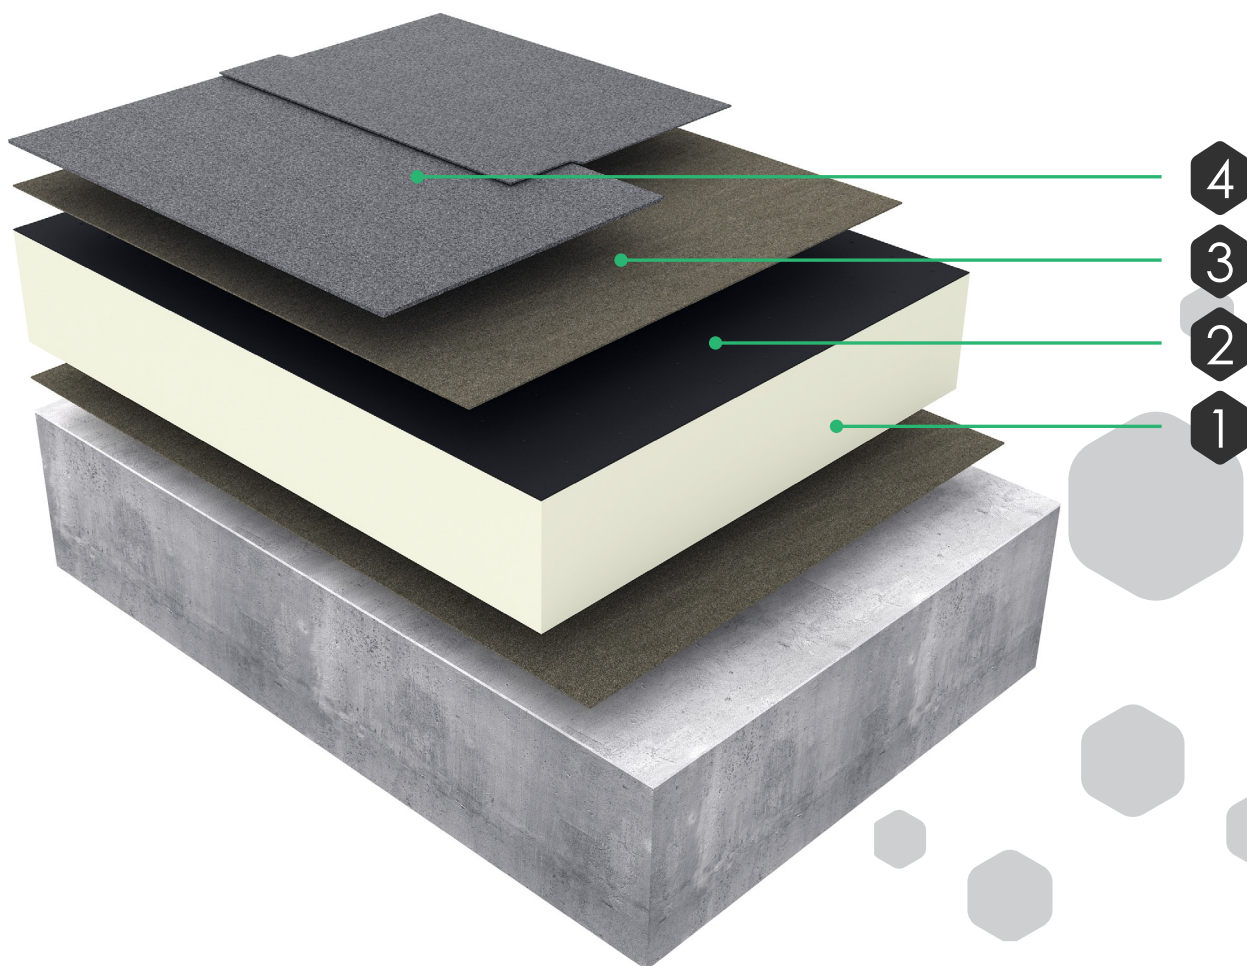

| Typical Assembly | |
|------------------|---|
| 4 | Euroroof Self-Adhesive Cap Sheet Euroroof SA Primer |
| 3 | Euroroof Self-Adhesive Underlay Euroroof SA Primer |
| 2 | PIR Insulation (type GTF) or Class A fire rated alternative PU Insulation Adhesive |
| 1 | Euroroof Self-Adhesive AVCL Euroroof SA Primer |

EUROROOF SELF-ADHESIVE CAP SHEET


Other Common System Types

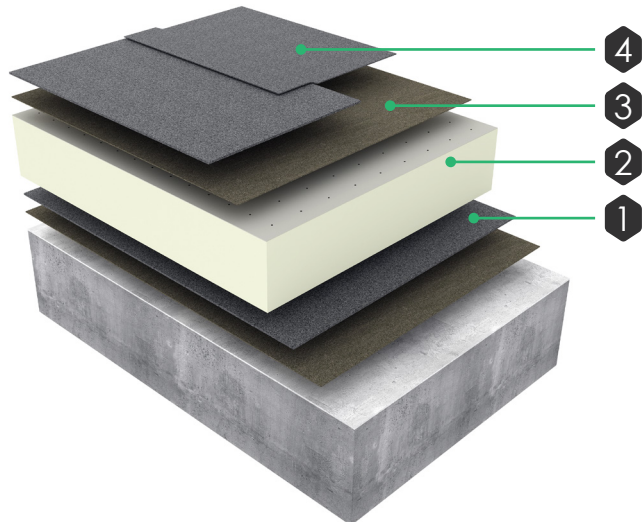

Insulated Overlay of Existing Waterproofing

| | |
|---|---|
| 4 | EurorooF Self-Adhesive Cap Sheet |
| | EurorooF SA Primer |
| 3 | EurorooF Self-Adhesive Underlay |
| | EurorooF SA Primer |
| 2 | PIR Insulation (type GTF) or Class A fire rated alternative |
| | PU Insulation Adhesive |
| 1 | Existing waterproofing |

NB. Air & Vapour Control Layer may be required, subject to condition of the existing waterproofing.

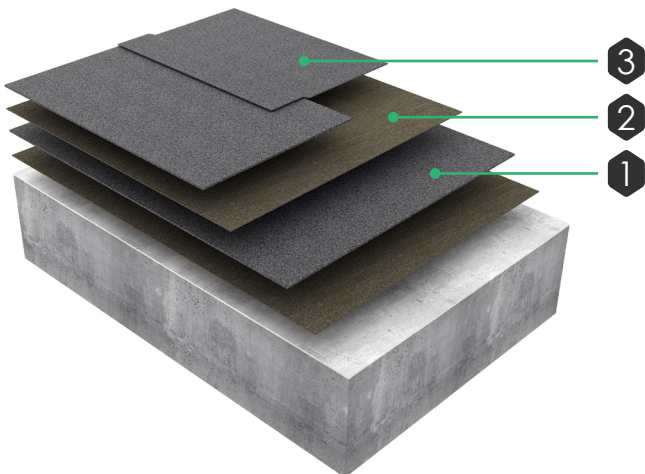

Cold Overlay of Existing Waterproofing

| | |
|---|----------------------------------|
| 3 | EurorooF Self-Adhesive Cap Sheet |
| | EurorooF SA Primer |
| 2 | EurorooF Self-Adhesive Underlay |
| | EurorooF SA Primer |
| 1 | Existing waterproofing |

Approvals

- Fire classification of **B_{roof}(t4)** in accordance with BS EN 13501-5



Warranties

Alumasc offers a comprehensive range of single-source warranty options for up to 25 Years. Installed exclusively by Registered Contractors and underpinned by Alumasc's extensive project support service, Alumasc warranties cover product, workmanship, and design.

Technical Support

Alumasc Technical Services can advise on all aspects of product selection, specification and integration of Alumasc systems into any building design.