

# EUROROOF TORCH-ON CAP SHEET




Eurorooftorch-On High Performance Roofing Systems comprise a premium torch applied reinforced APP polymer modified bituminous waterproofing membrane, underlays, insulation boards and air and vapour control layers (AVCL). Subject to the highest levels of certification and testing the system is fully adaptable to meet the individual requirements of every project for use across all building sectors in both refurbishment and new-build roofing and waterproofing projects.

## ✓ Where to Specify

- New Build
- Refurbishment
- Cold roofs
- Warm roofs (all roofing insulations)
- Overlay of existing waterproofing systems
- Compatible with all conventional roofing substrates

## ✓ Durability

BBA Certified - When installed on stable substrates and regularly maintained, the system will have a life in excess of 25 years.

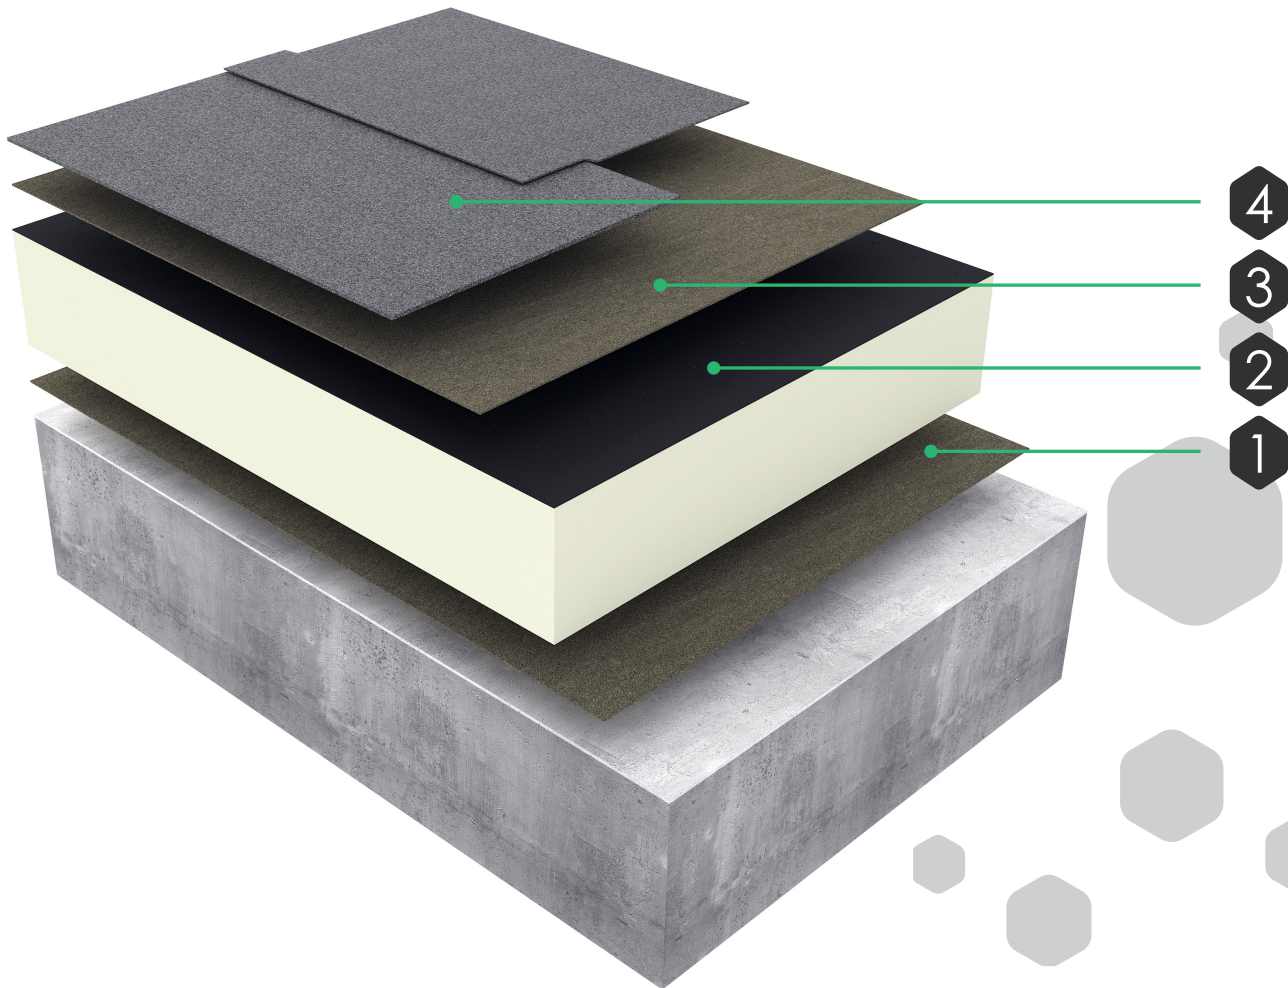


Typical Torch-On Assembly	
4	Eurorooftorch-On Cap Sheet*
3	Eurorooftorch-On Underlay
2	PIR Insulation (type BGT) or Class A fire rated alternative
	PU Insulation Adhesive
1	Eurorooftorch-On AVCL
	Alumasc Bitumen Primer

Typical Safe2Torch Assembly	
4	Eurorooftorch-On Cap Sheet*
3	Eurorooftorch Self-Adhesive Underlay
	Eurorooftorch SA Primer
2	PIR Insulation (type GTF) or Class A fire rated alternative
	PU Insulation Adhesive
1	Eurorooftorch Self-Adhesive AVCL
	Eurorooftorch SA Primer

\*System layer variants are also available.

# EUROROOF TORCH-ON CAP SHEET


## Other Common System Types

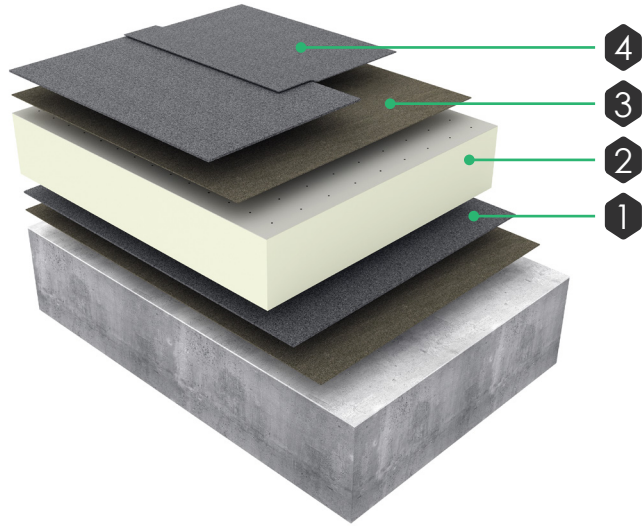

### Insulated Overlay of Existing Waterproofing

4	Eurorooft Torch-On Cap Sheet
3	Torch-On/Self-Adhesive Underlay
2	PIR Insulation or Class A fire rated alternative
	PU Insulation Adhesive
1	Existing waterproofing

**NB.** Air & Vapour Control Layer may be required, subject to condition of the existing waterproofing.

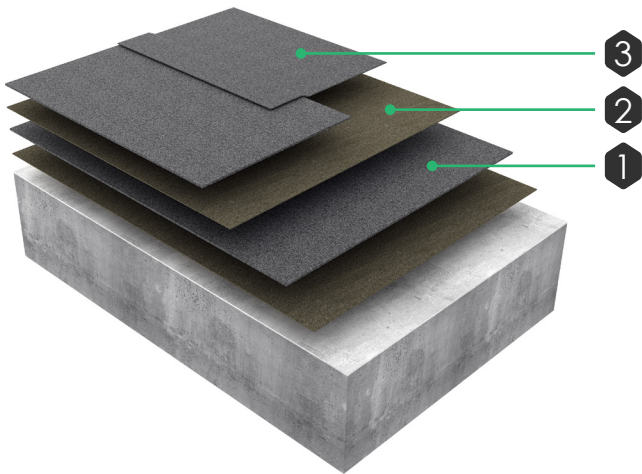

### Cold Overlay of Existing Waterproofing

3	Eurorooft Torch-On Cap Sheet
2	Torch-On/Self-Adhesive Underlay
	Primer, type according to AVCL
1	Existing waterproofing

### Approvals

- BBA Certificate No. 13/5066
- Fire classification of **B<sub>roof</sub>(t4)** in accordance with BS EN 13501-5



### Warranties

Alumasc offers a comprehensive range of single-source warranty options for up to 25 Years. Installed exclusively by Registered Contractors and underpinned by Alumasc's extensive project support service, Alumasc warranties cover product, workmanship, and design.

### Technical Support

Alumasc Technical Services can advise on all aspects of product selection, specification and integration of Alumasc systems into any building design.