

# AIRTILE LITESLATE


Authentic, Sustainable, Lightweight Slate



ALUMASC  
ROOFING

## ✓ Where to Specify

- Educational Buildings
- Commercial Buildings
- Flat to Pitch
- Community Centres
- Vertical Cladding

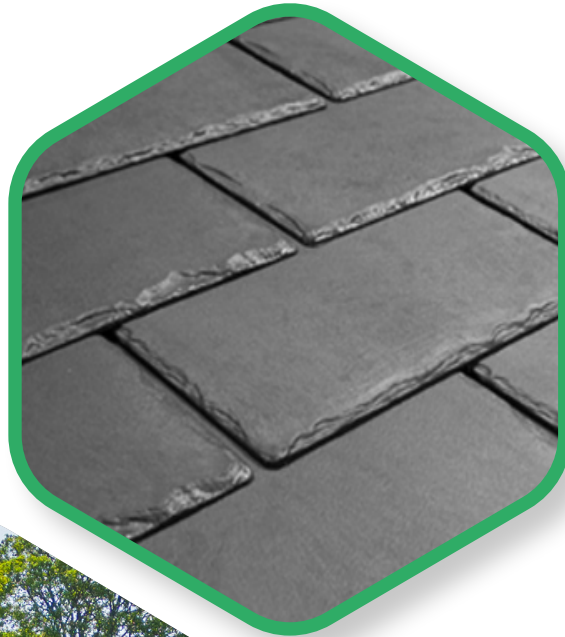

# AIRTILE LITESLATE

Authentic, Sustainable, Lightweight Slate



ALUMASC  
ROOFING

## ✓ Advantages

- British made
- Designed to give a traditional slate appearance
- Lightweight
- Low pitch
- Does not break or crack
- Quick installation
- Cost effective
- Virtually maintenance free
- Extensive range of accessories and flashings available
- Fully dry-fixed
- 40+ Year life expectancy

## ✓ Technical Data

- Minimum pitch 12°
- Maximum pitch 90°
- Weight: 0.6kg
- Overall width: 297mm
- Overall height: 445mm
- Batten gauge: 152mm-191mm
- Roof cover per slate: 0.06m<sup>2</sup>
- Slate per m<sup>2</sup>: 18-22
- Weight as laid per m<sup>2</sup>: 12kg
- Ridge: 5.5 per linear metre
- Hip: 5.5 to 6.5 per linear metre
- Material: recyclable blend of Polypropylene & Limestone
- Fire resistance: BS476 Part 3

## ✓ Approvals

- BBA Certificate No. 23/6869
- Manufactured using ISO 9001 approved materials
- ISO 14001

## ✓ Colours Available



Slate



Ash




Oak



Sunshine




Sunset



Amethyst



Charcoal

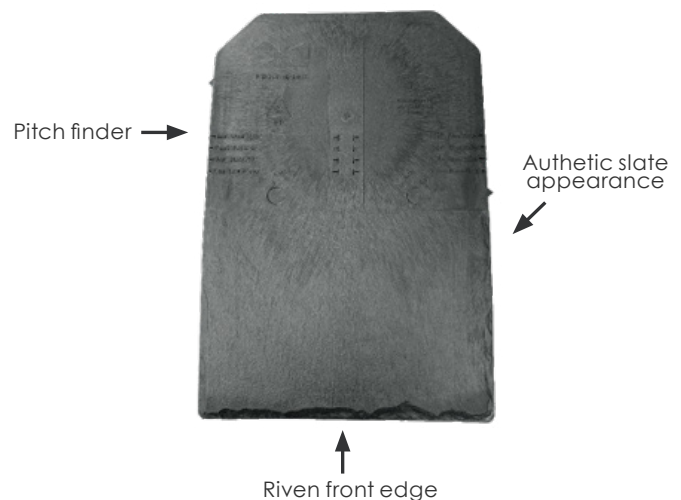

## ✓ Technical Support

Alumasc Technical Services can advise on all aspects of product selection, specification and integration of Alumasc systems into any building design.



+44 (0)1744 648400



technical@alumascroofing.com



www.alumascroofing.com

Ref: SSDS-AIR007 Issued:31/10/2023